




24 Input/8 Output DC Block I/O Module

Cat. No. 1791-24B8 Series B

Installation

Mount the block I/O module in a vertical (recommended) or horizontal position. Allow sufficient room around the block for cooling air to flow through the block module. Refer to Figure 1.

Figure 1
Mounting Dimensions for the Block I/O Module
Cat. No. 1791-24B8 (PLC version shown)

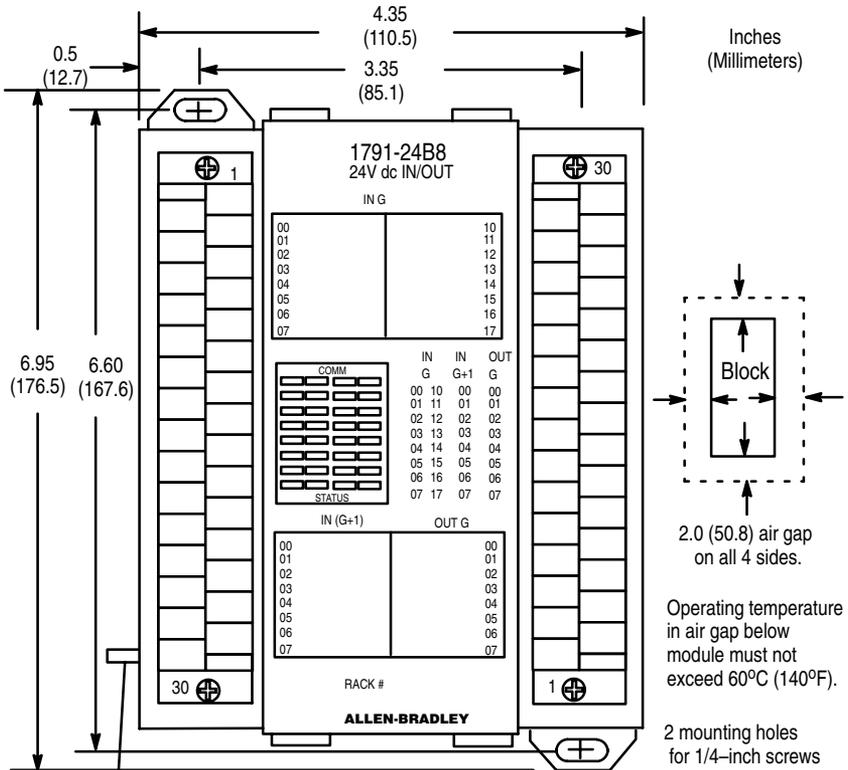

Equipment Grounding Stud

CAUTION: When tightening grounding stud nut, do not exceed 15 in-lbs.

Dimensions

6.95H x 4.35W x 3.85D
(176.5H x 110.5W x 98D)

Table B
Wiring Block Designations

| Connections | 1791-24B8 Series B | | Connector/Terminal | |
|----------------------------|--|--|--------------------------------------|-------------------------------|
| | Designation | Description | Left Conn. | Right Conn. |
| Power Connections | +24 | +24V dc Power | 1 | |
| | RET +24 | dc Return | 3 | |
| | GND | Chassis ground | 2 ¹ | |
| Remote I/O Connections | BLU | Blue wire – RIO | 6 | |
| | CLR | Clear wire – RIO | 8 | |
| | SHD | Shield – RIO | 7 | |
| I/O Connections | | | | |
| Input (G) ⁶ | PLC: in 00 thru 07 SLC: in 00 thru 07 | PLC: Input 00 thru 07 SLC: Input 00 thru 07 | 16, 18, 20, 22, 24, 26, 28, 30 | |
| | RET 1 | dc input return | 12, 14 ² | |
| | PLC: in 10 thru 17 SLC: in 08 thru 15 | PLC: Input 10 thru 17 SLC: Input 08 thru 15 | 15, 17, 19, 21, 23, 25, 27, 29 | |
| | RET 2 | dc input return | 11, 13 ³ | |
| Input (G + 1) ⁷ | PLC: in 00 thru 07 SLC: in 00 thru 07 | PLC: Input 00 thru 07 SLC: Input 00 thru 07 | | 15, 13, 11, 9, 7, 5, 3, 1 |
| | RET 3 | dc input return | | 19, 17 ⁴ |
| Output (G) ⁸ | PLC: out 00 thru 07 SLC: out 00 thru 07 | PLC: Output 00 thru 07 SLC: Output 00 thru 07 | | 16, 14, 12, 10, 8, 6, 4, 2 |
| | V dc 4 | dc output supply | | 20, 18 ⁵ |
| | RET 4 | dc output return | | 22 |
| | Not used | For internal test only; not for customer use. | 4, 5, 9, 10 | 29, 27, 26, 21 |
| | No Connection | No internal use; customer can use. | | 30, 28, 25, 24, 23 |

¹ Connect chassis ground to equipment grounding stud. These are not internally connected.

² Terminals 12 and 14 are internally connected.

³ Terminals 11 and 13 are internally connected.

⁴ Terminals 17 and 19 are internally connected.


⁵ Terminals 20 and 18 must be externally connected by customer to accommodate amperage rating.

⁶ IN G = input module group.

⁷ IN (G + 1) = input module group plus 1.

⁸ OUT (G) = output module group.

Figure 6
Switch Settings

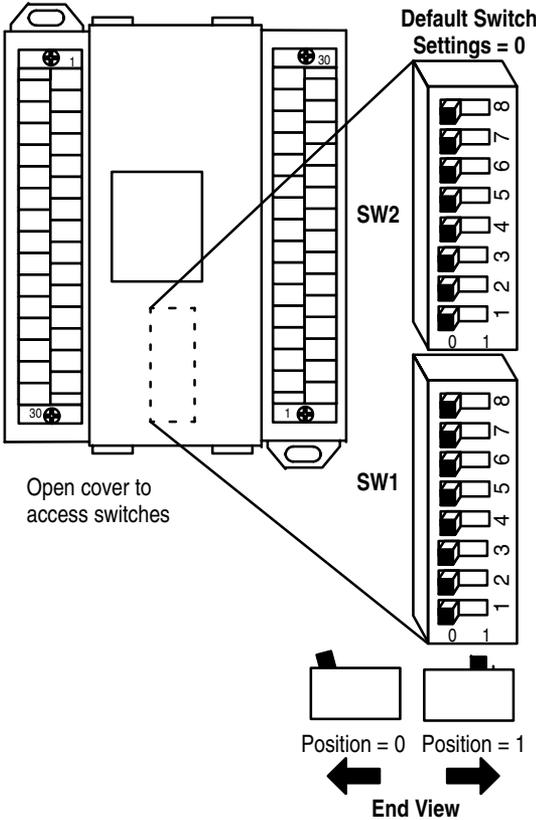

| |
|--------------|
| SW2-8 |
| Not used |

| | |
|--------------|--|
| SW2-7 | Filter Speed Select (Inputs only) |
| 0 | Slow |
| 1 | Fast |

| | |
|--------------|------------------------------------|
| SW2-6 | Last I/O Group (PLC-2 only) |
| 0 | Not last rack |
| 1 | Last rack |

| | |
|--------------|--|
| SW2-5 | Processor Restart/Lockout (PRL) |
| 0 | Processor Restart |
| 1 | Processor Lockout |

| | |
|--------------|------------------------|
| SW2-4 | Hold Last State |
| 0 | Reset Outputs |
| 1 | Hold Last State |

| |
|--------------|
| SW2-3 |
| Set to 0 |

| Communication Rate | | |
|--------------------|-------|---------|
| SW2-2 | SW2-1 | Bits/s |
| 0 | 0 | 57.6 K |
| 0 | 1 | 115.2 K |
| 1 | 0 | 230.4 K |
| 1 | 1 | 230.4 K |

| Starting Quarter | | |
|------------------|-------|--------------|
| SW1-2 | SW1-1 | Module Group |
| 0 | 0 | 0 (1st) |
| 0 | 1 | 2 (2nd) |
| 1 | 0 | 4 (3rd) |
| 1 | 1 | 6 (4th) |

ATTENTION: Cycle power to the module after setting the switches.

Installation Instructions
Block I/O
Cat. No. 1791-24B8 Series B

| 1747-SN Rack Number | 1771-SN Rack Number | PLC-2 Rack Number | PLC-5 Rack Number | PLC-5/250 Rack Number | PLC-3 Rack Number | SW1 Switch Position | | | | | |
|---------------------------|---------------------------|-------------------------|-------------------------|-----------------------------|-------------------------|---------------------|---|---|---|---|---|
| | | | | | | 8 | 7 | 6 | 5 | 4 | 3 |
| Rack 0 | Rack 1 | Rack 1 | Not Valid | Rack 0 | Rack 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Rack 1 | Rack 2 | Rack 2 | Rack 1 | Rack 1 | Rack 1 | 0 | 0 | 0 | 0 | 0 | 1 |
| Rack 2 | Rack 3 | Rack 3 | Rack 2 | Rack 2 | Rack 2 | 0 | 0 | 0 | 0 | 1 | 0 |
| Rack 3 | Rack 4 | Rack 4 | Rack 3 | Rack 3 | Rack 3 | 0 | 0 | 0 | 0 | 1 | 1 |
| | Rack 5 | Rack 5 | Rack 4 | Rack 4 | Rack 4 | 0 | 0 | 0 | 1 | 0 | 0 |
| | Rack 6 | Rack 6 | Rack 5 | Rack 5 | Rack 5 | 0 | 0 | 0 | 1 | 0 | 1 |
| | Rack 7 | Rack 7 | Rack 6 | Rack 6 | Rack 6 | 0 | 0 | 0 | 1 | 1 | 0 |
| | | | Rack 7 | Rack 7 | Rack 7 | 0 | 0 | 0 | 1 | 1 | 1 |
| | | | Rack 10 | Rack 10 | Rack 10 | 0 | 0 | 1 | 0 | 0 | 0 |
| | | | Rack 11 | Rack 11 | Rack 11 | 0 | 0 | 1 | 0 | 0 | 1 |
| | | | Rack 12 | Rack 12 | Rack 12 | 0 | 0 | 1 | 0 | 1 | 0 |
| | | | Rack 13 | Rack 13 | Rack 13 | 0 | 0 | 1 | 0 | 1 | 1 |
| | | | Rack 14 | Rack 14 | Rack 14 | 0 | 0 | 1 | 1 | 0 | 0 |
| | | | Rack 15 | Rack 15 | Rack 15 | 0 | 0 | 1 | 1 | 0 | 1 |
| | | | Rack 16 | Rack 16 | Rack 16 | 0 | 0 | 1 | 1 | 1 | 0 |
| | | | Rack 17 | Rack 17 | Rack 17 | 0 | 0 | 1 | 1 | 1 | 1 |
| | | | Rack 20 | Rack 20 | Rack 20 | 0 | 1 | 0 | 0 | 0 | 0 |
| | | | Rack 21 | Rack 21 | Rack 21 | 0 | 1 | 0 | 0 | 0 | 1 |
| | | | Rack 22 | Rack 22 | Rack 22 | 0 | 1 | 0 | 0 | 1 | 0 |
| | | | Rack 23 | Rack 23 | Rack 23 | 0 | 1 | 0 | 0 | 1 | 1 |
| | | | Rack 24 | Rack 24 | Rack 24 | 0 | 1 | 0 | 1 | 0 | 0 |
| | | | Rack 25 | Rack 25 | Rack 25 | 0 | 1 | 0 | 1 | 0 | 1 |
| | | | Rack 26 | Rack 26 | Rack 26 | 0 | 1 | 0 | 1 | 1 | 0 |
| | | | Rack 27 | Rack 27 | Rack 27 | 0 | 1 | 0 | 1 | 1 | 1 |
| | | | Rack 30 | Rack 30 | Rack 30 | 0 | 1 | 1 | 0 | 0 | 0 |
| | | | Rack 31 | Rack 31 | Rack 31 | 0 | 1 | 1 | 0 | 0 | 1 |
| | | | Rack 32 | Rack 32 | Rack 32 | 0 | 1 | 1 | 0 | 1 | 0 |
| | | | Rack 33 | Rack 33 | Rack 33 | 0 | 1 | 1 | 0 | 1 | 1 |
| | | | Rack 34 | Rack 34 | Rack 34 | 0 | 1 | 1 | 1 | 0 | 0 |
| | | | Rack 35 | Rack 35 | Rack 35 | 0 | 1 | 1 | 1 | 0 | 1 |
| | | | Rack 36 | Rack 36 | Rack 36 | 0 | 1 | 1 | 1 | 1 | 0 |
| | | | Rack 37 | Rack 37 | Rack 37 | 0 | 1 | 1 | 1 | 1 | 1 |
| | | | Rack 40 | Rack 40 | Rack 40 | 1 | 0 | 0 | 0 | 0 | 0 |
| | | | Rack 41 | Rack 41 | Rack 41 | 1 | 0 | 0 | 0 | 0 | 1 |
| | | | Rack 42 | Rack 42 | Rack 42 | 1 | 0 | 0 | 0 | 1 | 0 |
| | | | Rack 43 | Rack 43 | Rack 43 | 1 | 0 | 0 | 0 | 1 | 1 |
| | | | Rack 44 | Rack 44 | Rack 44 | 1 | 0 | 0 | 1 | 0 | 0 |
| | | | Rack 45 | Rack 45 | Rack 45 | 1 | 0 | 0 | 1 | 0 | 1 |
| | | | Rack 46 | Rack 46 | Rack 46 | 1 | 0 | 0 | 1 | 1 | 0 |
| | | | Rack 47 | Rack 47 | Rack 47 | 1 | 0 | 0 | 1 | 1 | 1 |
| | | | Rack 50 | Rack 50 | Rack 50 | 1 | 0 | 1 | 0 | 0 | 0 |

Installation Instructions
 Block I/O
 Cat. No. 1791-24B8 Series B

| 1747-SN Rack Number | 1771-SN Rack Number | PLC-2 Rack Number | PLC-5 Rack Number | PLC-5/250 Rack Number | PLC-3 Rack Number | SW1 Switch Position | | | | | |
|---------------------------|---------------------------|-------------------------|-------------------------|-----------------------------|-------------------------|---------------------|---|---|---|---|---|
| | | | | | | 8 | 7 | 6 | 5 | 4 | 3 |
| | | | | | Rack 51 | 1 | 0 | 1 | 0 | 0 | 1 |
| | | | | | Rack 52 | 1 | 0 | 1 | 0 | 1 | 0 |
| | | | | | Rack 53 | 1 | 0 | 1 | 0 | 1 | 1 |
| | | | | | Rack 54 | 1 | 0 | 1 | 1 | 0 | 0 |
| | | | | | Rack 55 | 1 | 0 | 1 | 1 | 0 | 1 |
| | | | | | Rack 56 | 1 | 0 | 1 | 1 | 1 | 0 |
| | | | | | Rack 57 | 1 | 0 | 1 | 1 | 1 | 1 |
| | | | | | Rack 60 | 1 | 1 | 0 | 0 | 0 | 0 |
| | | | | | Rack 61 | 1 | 1 | 0 | 0 | 0 | 1 |
| | | | | | Rack 62 | 1 | 1 | 0 | 0 | 1 | 0 |
| | | | | | Rack 63 | 1 | 1 | 0 | 0 | 1 | 1 |
| | | | | | Rack 64 | 1 | 1 | 0 | 1 | 0 | 0 |
| | | | | | Rack 65 | 1 | 1 | 0 | 1 | 0 | 1 |
| | | | | | Rack 66 | 1 | 1 | 0 | 1 | 1 | 0 |
| | | | | | Rack 67 | 1 | 1 | 0 | 1 | 1 | 1 |
| | | | | | Rack 70 | 1 | 1 | 1 | 0 | 0 | 0 |
| | | | | | Rack 71 | 1 | 1 | 1 | 0 | 0 | 1 |
| | | | | | Rack 72 | 1 | 1 | 1 | 0 | 1 | 0 |
| | | | | | Rack 73 | 1 | 1 | 1 | 0 | 1 | 1 |
| | | | | | Rack 74 | 1 | 1 | 1 | 1 | 0 | 0 |
| | | | | | Rack 75 | 1 | 1 | 1 | 1 | 0 | 1 |
| | | | | | Rack 76 | 1 | 1 | 1 | 1 | 1 | 0 |
| | | | | | Not Valid | 1 | 1 | 1 | 1 | 1 | 1 |

Rack address 77 is an illegal configuration.
 PLC-5/11 processors can scan rack 03.
 PLC-5/15 and PLC-5/20 processors can scan racks 01–03.
 PLC-5/25 and PLC-5/30 processors can scan racks 01–07.
 PLC-5/40 and PLC-5/40L processors can scan racks 01–17.
 PLC-5/60 and PLC-5/60L processors can scan racks 01–27.
 PLC-5/250 processors can scan racks 00–37.

The SLC 500 controllers communicate with the block I/O using an I/O Scanner module (cat. no. 1747-SN series A). Refer to the user manual for the 1747-SN/A Scanner module for more information.

Important: This block I/O module is **not** compatible with the **1747-DSN** Distributed I/O Scanner module.


Termination Resistor

A termination resistor must be installed on the last block in a series. Connect the resistor as shown in Figure 7.

Figure 7
Installing the Termination Resistor

Connect termination resistor across terminals 6 (BLU) and 8 (CLR).

150 ohm – 57.6K and 115.2K bits/s
 82 ohm – 230.4K bits/s

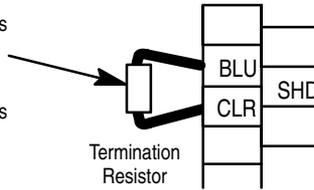

10835-I



ATTENTION: Devices that are operating at 230.4K bits/s must have 82 ohm terminators in place for proper operation.

Indicators

PLC

| COMM | | | | IN | IN | OUT | |
|--------------------------|--------------------------|--------------------------|--------------------------|----|-----|-----|----|
| | | | | G | G+1 | G | |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 00 | 10 | 00 | 00 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 01 | 11 | 01 | 01 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 02 | 12 | 02 | 02 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 03 | 13 | 03 | 03 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 04 | 14 | 04 | 04 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 05 | 15 | 05 | 05 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 06 | 16 | 06 | 06 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 07 | 17 | 07 | 07 |
| STATUS | | | | | | | |

SLC

| COMM | | | | IN | IN | OUT | |
|--------------------------|--------------------------|--------------------------|--------------------------|----|-----|-----|----|
| | | | | G | G+1 | G | |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 00 | 08 | 00 | 00 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 01 | 09 | 01 | 01 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 02 | 10 | 02 | 02 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 03 | 11 | 03 | 03 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 04 | 12 | 04 | 04 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 05 | 13 | 05 | 05 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 06 | 14 | 06 | 06 |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 07 | 15 | 07 | 07 |
| STATUS | | | | | | | |

| Indicator | | Description |
|-----------|----------|---|
| COMM | OFF | Communication not established |
| | ON | Communication established |
| | Flashing | Processor in Program mode |
| STATUS | OFF | Normal |
| | ON | Error (hardware or software), block power low |
| | Flashing | COMM FAIL – communication cable disconnected, 100ms between valid frames, no more than 255 valid frames between valid frames addressed to block, 20ms idle time exceeded. |

COMM and STATUS will alternately flash when processor restart lockout is selected, a fault has occurred and the processor is communicating with the block.

Fusing

The block I/O module is internally fused to protect the module. No external power fusing is required.

The outputs of the block I/O modules are not fused. Fusing of outputs is recommended. If desired to fuse an output, you must provide external fusing.

Table C
Recommended Fuses

| Type of Circuit | Part Number ¹ | Size | Rating in Amps | Maximum Surge Current ² (repeatable every 2s) |
|-----------------|--------------------------|---------------------|--------------------|---|
| dc | Littelfuse 322 1.25 | 0.25 in. x 1.25 in. | 1.25A | 2.25A for 50ms |
| | SAN-O MQ4-800 | 5mm x 20mm | 800mA ³ | 2.0A for 50ms |

¹ **Note:** Do not substitute another fuse for those listed.

² The recommended fuses will withstand surges of the above listed currents for the time specified.

³ Current must be limited to 650mA when using this fuse.

Block I/O modules are derated linearly above 30°C up to and including 60°C.

Table D
Output Ratings and Non-fused Surge Currents

| Catalog Number | Voltage | Mounting | Max. Output Rating: | | Maximum Surge Current ¹ (repeatable every 2s) |
|----------------|---------|------------|---------------------|--------|---|
| | | | @ 30°C | @ 60°C | |
| 1791-24B8/B | 24V dc | Vertical | 1A | 500mA | 3A for 50ms |
| | | Horizontal | 500mA | 250mA | |

¹ These surge ratings are for non-fused outputs only.

1791-24B8 Specifications

Input Specifications

| | | |
|------------------------|--------------------|---|
| Inputs per Block | | 24 – 3 groups of 8 |
| On-state Voltage Range | | 10–30V dc |
| On-state Current | Maximum Minimum | 11.0mA @ 30V 2.5mA @ 10V |
| Off-state Voltage | Maximum | 5V dc |
| Off-state Current | Minimum | 1.5mA |
| Input Impedance | Maximum | 3.4K ohms |
| Input Signal Delay | Fast Slow | 1.0ms on; 5.0ms off (maximum) 1.0ms on; 18.0ms off (maximum) |

Output Specifications

| | | |
|-------------------------------------|----------------------------------|---|
| Outputs per Block | | 8 – 1 group of 8 |
| Output Voltage Range | | 10–30V dc |
| Output Current Rating | Vertical Mtg. Horizontal Mtg. | 500mA @ 60°C, 1A @ 30°C 250mA @ 60°C, 500mA @ 30°C |
| Surge Current | | 3A for 50ms each, repeatable every 2 sec. |
| Minimum On-state Current | | 1mA per output |
| Maximum On-state Voltage Drop | | 1.0V @ rated current |
| Off-state Leakage Current (maximum) | | 0.5mA |
| Output Signal Delay | | 0.5ms on; 1.0ms off (maximum) |

Installation Instructions

Block I/O

Cat. No. 1791-24B8 Series B

General Specifications

| | | |
|---|-------------------------|---|
| External Power (internally protected - no external fuse required) | | |
| | Voltage | 19.2–30V dc |
| | Current | 300mA |
| Dimensions | | |
| | Inches | 6.95H X 4.35W X 3.85D |
| | Millimeters | 176.5H X 110.5W X 98D |
| Isolation | | |
| | Power supply to RIO | 500V ac |
| | I/O Group-to-Group | 500V ac |
| | I/O Group-to-Logic | 500V ac |
| Power Dissipation | | |
| | Maximum | 17.1 Watts |
| Thermal Dissipation | | |
| | Maximum | 58.1 BTU/hr |
| Environmental Conditions | | |
| | Operational Temperature | 0 to 60°C (32 to 140°F) |
| | Storage Temperature | –40 to 85°C (–40 to 185°F) |
| | Relative Humidity | 5 to 95% noncondensing |
| Conductors | | |
| | Wire Size | 14 gauge (2mm ²) stranded maximum 3/64 inch insulation maximum |
| | Category | 1 ⁴ |

¹ You use this conductor category information for planning conductor routing as described in the system level installation manual.



ALLEN-BRADLEY
A ROCKWELL INTERNATIONAL COMPANY

WORLD HEADQUARTERS
Allen-Bradley
1201 South Second Street
Milwaukee, WI 53204 USA
Tel: (414) 382-2000
Telex: 43 11 016
FAX: (414) 382-4444

With offices in major cities worldwide _____